




Lance Brown Import-Export

51A Harrison Street • Balcatta 6021 • AUSTRALIA
Tel +614 1893 4827 • Fax +618 9349 9255 • Home +618 9349 5064
E-mail: mail@LBIE.com • Website: www.LBIE.com
Australian Business Number 47 243 059 295
Fiberglass Materials: Minimum Price – Maximum Service

Basalt Fiber Fire-Proof Panel

The products is the extent application of basalt fiber incombustibility and high-temperature resistance, which was produced by the basalt fiber hybrid with the imported organic (inorganic) binder. The main products forms are refractory material, separated board. It also owns the excellent performance under 1000 °C. no deformation, no blowout can be used in the moisture, smoke and chemical gas conditions.

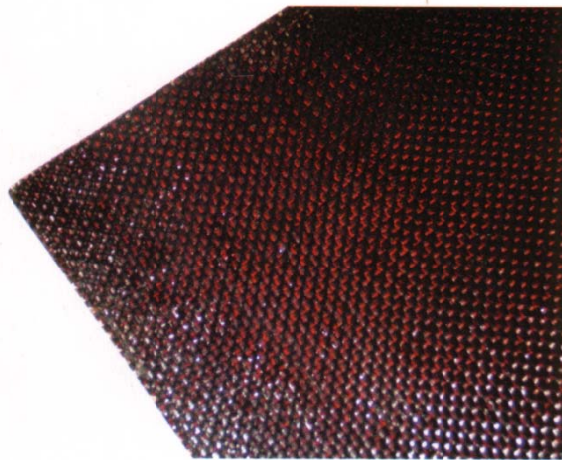

Basalt Fiber Fire-Proof Panel Technical Index

Product No.	Diameter (μm)	Area weight (g/m ²)	Resin Type	Work temperature (°C)	thickness (mm)
BWFB13-350	13	3800	Phenolic	350-400	0.43
BWFB13-700	13	7600	Phenolic	350-400	0.68