




Lance Brown Import-Export

51A Harrison Street • Balcatta 6021 • AUSTRALIA
 International: Tel +614 1893 4827 • Fax +618 9349 9255
 Australia: Tel 0418 934 827 • Fax (08) 9349 9255
 E-mail: mail@LBIE.com • Website: www.LBIE.com
 ABN 47 243 059 295
 Fiberglass Materials: Minimum Price – Maximum Service

Specification for Alkali-Resistant Fiberglass Mesh

This special fiberglass net is woven from e-glass fiber and then treated with acroleic acid copolmer colloid. Its properties are alkali-resistance, high strength and chemistry stable. It is used to reinforce concrete, plastic, pitch, plasterboard, roof materials, and on other materials.

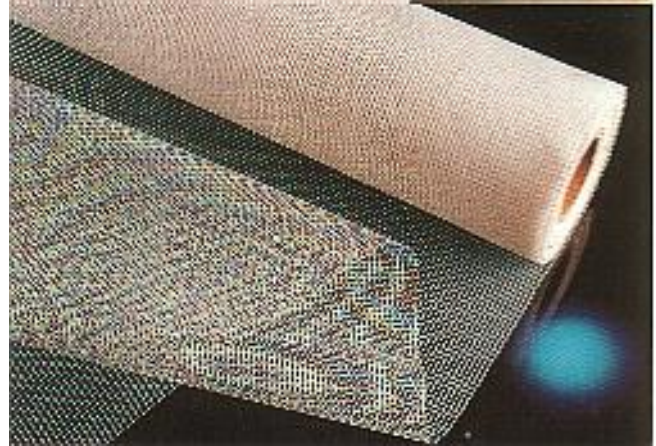

Specification	Yarn Tex		Density Count/25mm		Treated Woven Mass g/m ²	Tensile Strength N/5cm X 20cm		Woven Structure	Content of resin%(≥)
	Warp	Weft	Warp	Weft		Crosswise	Lengthwise		
CAP50-19X7	17X2	68	19	7	50	≥650	≥500	Plain	12
CAG55-9X9	50	68	9	9	55	≥450	≥600	Leno	18
CAG60-10X10	50	68	10	10	60	≥500	≥650	Leno	18
CAP60-20X10	17X2	68	20	10	60	≥650	≥650	Plain	12
CAG65-5X5	132	132	5	5	65	≥660	≥660	Leno	18
CAP70-20X10	22X2	66	20	10	70	≥850	≥650	Plain	12
CAG70-6X5	132	132	6	5	70	≥750	≥700	Leno	18
CAG70-8X8	50	132	8	8	70	≥400	≥1050	Leno	18
CAG75-8X6	88	132	8	6	75	≥700	≥800	Leno	18
CAG75-10X10	88	66	10	10	75	≥880	≥650	Leno	18
CAG80-6X6	132	132	6	6	80	≥750	≥800	Leno	18
CAG80-6X5	132	165	6	5	80	≥750	≥850	Leno	18
CAG85-8X8	88	132	8	8	85	≥700	≥1050	Leno	18
CAG90-6X5	132	198	6	5	89	≥750	≥1000	Leno	18
CAG90-8X6	132	132	8	6	90	≥1050	≥800	Leno	18
CAG90-7X7	132	132	7	7	90	≥900	≥900	Leno	18
CAG90-6X6	132	165	6	6	89	≥750	≥900	Leno	18
CAG100-4X3.5	264	264	4	3.5	100	≥1050	≥900	Leno	18
CAG115-6X6	198	198	6	6	115	≥1180	≥1180	Leno	18
CAG130-5X5	264	264	5	5	130	≥1300	≥1300	Leno	18
CAG130-2.5X2.5	528	528	2.5	2.5	130	≥1300	≥1300	Leno	18
CAG145-5X5	264	330	5	5	145	≥1300	≥1650	Leno	18
CAG150-5X5	264	330	5	5	150	≥100	≥1300	Leno	18
CAG160-6X6	264	264	6	6	160	≥1200	≥1200	Leno	18
CAG160-6X5.5	264	297	6	5.5	160	≥1200	≥1300	Leno	18
CAG180-4X3.5	396	600	4	3.5	180	≥1250	≥1500	Leno	18
CAG300-6X6	396	528	6	6	300	≥1700	≥2200	Leno	28
CAG400-4X4	660	1200	4	4	400	≥1800	≥3300	Leno	28
CAG450-5X4	660	1200	5	4	450	≥2500	≥3000	Leno	28
CAG600-4X2.75	990	2400	4	2.75	600	≥2400	≥4000	Leno	28
CAG680-3.5-3	1320	2400	3.5	3	680	≥2900	≥4500	Leno	28